


Moteurs carcasse fonte à trous taraudés B14

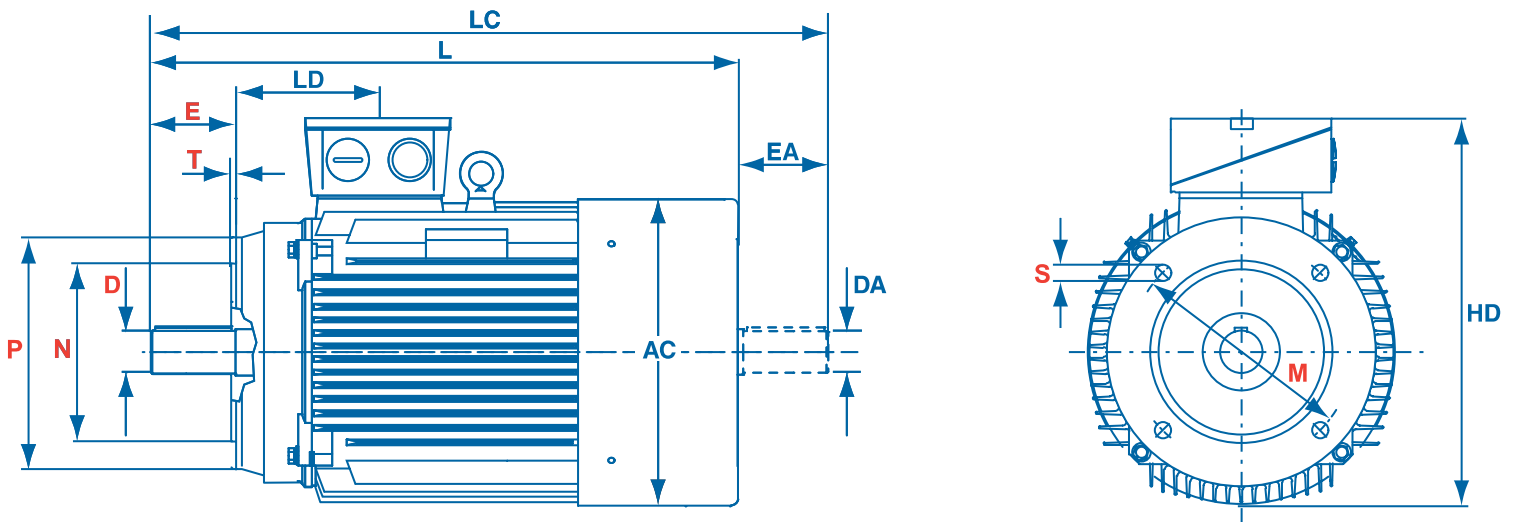

Type	Poles	Dimensions in mm		Abmessungen in mm							Dimensions en mm					Dimensiones en mm					
		AC	D	DA	E	EA	HD	L*	LC	LD	Eye Bolt	Small Flange (B14S)					Large Flange (B14L)				
		M	N	P	S	T	M	N	P	S	T										
DM1 80 K / G	2 - 10	160	19j6	19j6	40	40	225	280	324	100	- No -	100	80j6	120	M6	3	130	110j6	160	M8	3,5
DM1 90 S	2 - 12	175	24j6	24j6	50	50	245	315	368	105	- No -	115	95j6	140	M8	3,5	165	130j6	200	M10	4
DM1 90 L								340	393	120		M8									
DM1 100 L / Lx		200	28j6	28j6	60	60	280	375	438	130	M8	130	110j6	160							
DM1 112 M		220					305	400	464	145											
DM1 132 S / Sx		260	38k6	38k6	80	80	355	465	548	165	M10	165	130j6	200	M10		215	180j6	250	M12	4
DM1 132 M / Mx								505	588	185											
DM1 160 M / Mx		315	42k6	42k6	110	110	425	608	721	212	M12	215	180j6	250	M12	4	265	230j6	300	M12	5
DM1 160 L								652	745	235											

* DM1-HE 100 : L = 435 / DM1-HE 112 : L = 450