


Moteurs carcasse fonte à bride à trous lisses B5

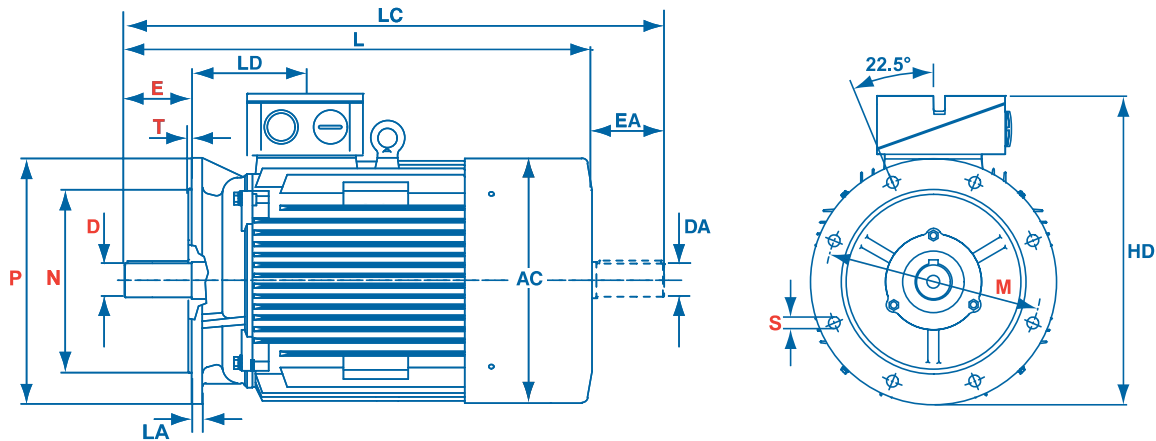

Dimensions in mm		Abmessungen in mm				Dimensions en mm				Dimensiones en mm				Flange																
Type	Poles	AC	D	DA	E	EA	HD	L*	LA	LC	LD	M	N	P	S	T														
DM1 80 K / G	2 - 10	160	19j6	19j6	40	40	245	280	12	324	100	165	130j6	200	4Ø12	3.5	FF 165													
DM1 90 S	2 - 12	175	24j6	24j6	50	50	252	315	12	368	105	215	180j6	250	4Ø15	4	FF 215													
DM1 90 L								340		120																				
DM1 100 L / Lx	200	28j6	28j6	60	60	290	375	13	438	130	265	230j6	300	4Ø19	5	FF 300														
DM1 112 M							220		310	400							14	464	145											
DM1 132 S / Sx	260	38k6	38k6	80	80	363	465	15	548	165	300	250j6	350	4Ø19	5	FF 265														
DM1 132 M / Mx							505		588	185																				
DM1 160 M / Mx	315	42k6	42k6	110	110	425	608	15	721	212	300	250j6	350	4Ø19	5	FF 300														
DM1 160 L							652		745	235																				
DM1 180 M	360	48k6	48k6	110	110	448	690	17	803	240	350	300h6	400	4Ø19	5	FF 350														
DM1 180 L							730		843	240																				
DM1 200 L / Lx	2	400	55m6	48k6	55m6	503	760	17	873	185	350	300h6	400	4Ø19	5	FF 400														
DM1 200 L / Lx	4 - 12																													
DM1 225 S	4 - 12	450	60m6	48k6	55m6	140	555	810	20	923	400	350h6	450	8Ø19	5	FF 400														
DM1 225 M	2									805							918													
DM1 225 M	4 - 12									835							948													
DM1 250 M	2	485	65m6	55m6	140	645	910	22	1023	207	500	450h6	550	8Ø19	5	FF 500														
DM1 250 M	4 - 12																													
DM1 280 S	2	550	75m6	60m6	140	664	985	1005	1101	215	500	450h6	550	8Ø19	5	FF 500														
DM1 280 S	4 - 12																													
DM1 280 M	2	550	65m6	55m6	110	664	985	1030	1101	215	500	450h6	550	8Ø19	5	FF 500														
DM1 280 M	4 - 12																													
DM1 280 M	4 - 12	550	75m6	60m6	140	664	985	1060	1101	215	500	450h6	550	8Ø19	5	FF 500														
DM1 280 M	4 - 12																													
DM1 315 S	2	550	75m6	60m6	140	664	985	1060	1101	215	600	550h6	660	8Ø24	6	FF 600														
DM1 315 S	4 - 12																													
DM1 315 M	2																													
DM1 315 M	4 - 12																													
DM1 315 L / Lx	2																													
DM1 315 L / Lx	4 - 12																													
DM1 355 M	2																740	680	800	8Ø24	940	880	1000	8Ø28	940	880	1000	8Ø28	6	FF 740
DM1 355 M	4 - 12																													
DM1 355 L (x/y)	2																740	680	800	8Ø24	940	880	1000	8Ø28	940	880	1000	8Ø28	6	FF 740
DM1 355 L (x/y)	4 - 12																													
DM1 400 M / L	2	740	680	800	8Ø24	940	880	1000	8Ø28	940	880	1000	8Ø28	6	FF 740															
DM1 400 M / L	4 - 12																													

* DM1-HE 100 : L = 435 / DM1-HE 112 : L = 450

DM1 315 - 400 not allowed in IM B5