


Moteurs carcasse fonte à pattes et à bride à trous taraudés B34

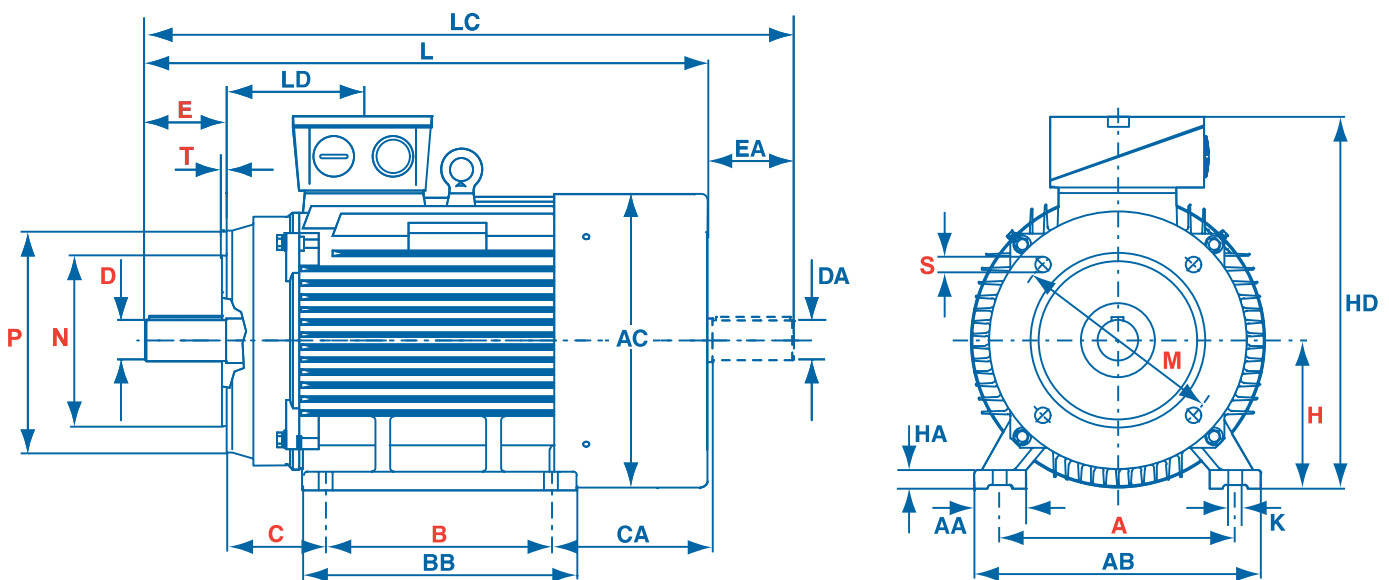

Flange measurements see DM1 80 - 160 : IM B14

Dimensions in mm		Abmessungen im mm								Dimensions en mm							Dimensiones en mm				
Type	Poles	A	AA	AB	AC	B	BB	C	CA	D	DA	E	EA	H	HA	HD	K	L*	LC	LD	Eye Bolt
DM1 80 K/ G	2 - 10	125	35	160	160	100	130	50	85	19j6	19j6	40	40	80	12	225	10	280	324	100	- No -
DM1 90 S	2 - 12	140	36	180	175	125	140	56	104	24j6	24j6	50	50	90		245		315	368	105	
DM1 90 L							340											393	120		
DM1 100 L / Lx		160	40	200	200	140	175	63	107	28j6	28j6	60	60	100	14	280	12	375	438	130	M8
DM1 112 M		190	45	230	220		180	70	125					112	15	305		400	464	145	
DM1 132 S / Sx		216	55	265	260	178	190	89	151	38k6	38k6	80	80	132	18	355		465	548	165	M10
DM1 132 M / Mx	505						588											185			
DM1 160 M / Mx		254	65	315	315	210	260	108	175	42k6	42k6	110	110	160	20	425	15	608	721	212	M12
DM1 160 L	652						745											235			

* DM1-HE 100 : L = 435 / DM1-HE 112 : L = 450